


GV-Combo Card (DVI-Type PCI)

GV-Combo Card (DVI-Type PCI) provides a "single card solution" for 16 video/audio recording, real-time display and TV-out display .

Packing List

- ❶ GV-Combo Card x 1
- ❷ 1-16 DVI Video plus TV Out Cable x 1
- ❸ 1-16 DVI Audio Cable x 1
- ❹ Hardware Watchdog Jumper Wire x 1
- ❺ Software DVD x 1
- ❻ Installation Guide x 1

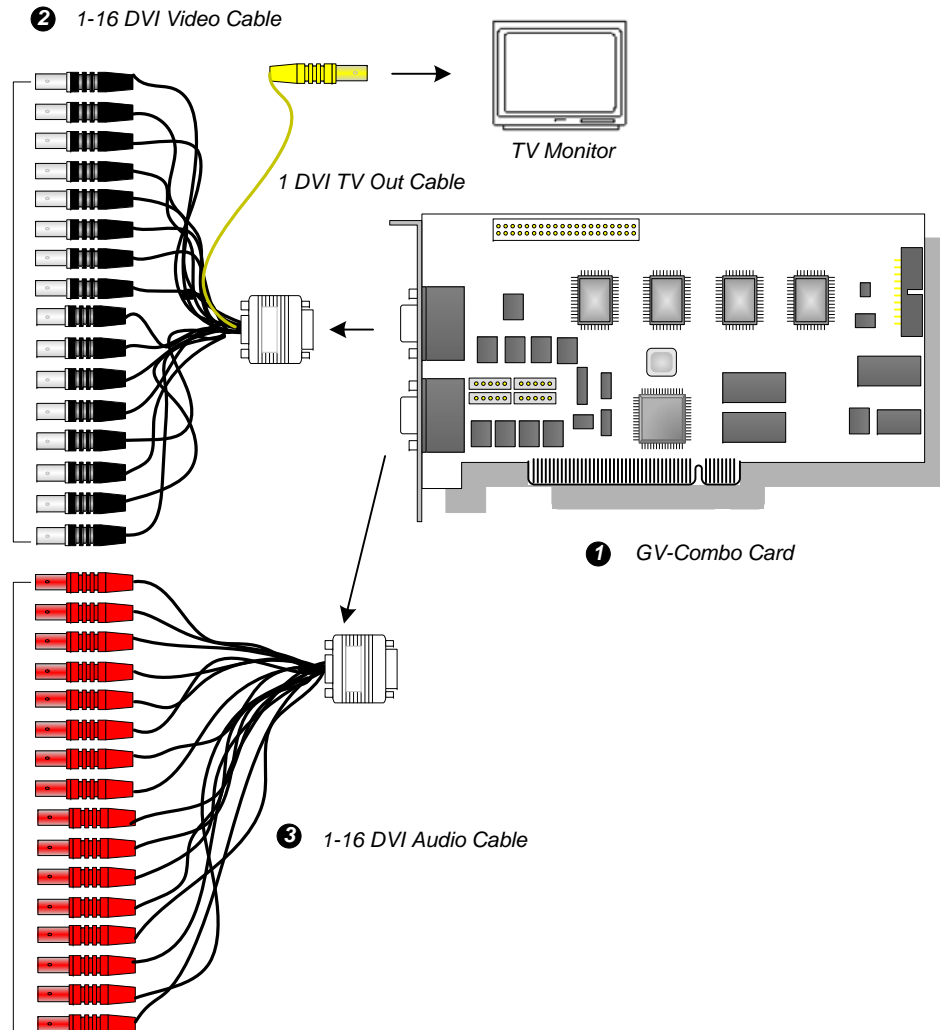

Specifications

Input Type	DVI x 1 (for Video), DVI x 1 (for Audio)	
Video Input / Audio Input	GV-1480	16 Channels
	GV-1240	8, 16 Channels
	GV-1120	8, 12, 16 Channels
TV Output	RCA connector x 1	
Recording Rate	GV-1480	480 fps (NTSC), 400 fps (PAL)
	GV-1240	240 fps (NTSC), 200 fps (PAL)
	GV-1120	120 fps (NTSC), 100 fps (PAL)
Display Rate	480 fps (NTSC), 400 fps (PAL)	
Video Resolution	NTSC	720x480, 720x480 De-interlace, 640x480, 640x480 De-interlace, 360x240, 320x240
	PAL	720x576, 720x576 De-interlace, 640x480, 640x480 De-interlace, 360x288, 320x240
Compression Format	Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2	
GV-NET/IO Card Support	Yes	
Dimensions	165 x 95 (mm) / 6.5 x 3.74 (in)	

Minimum System Requirements

OS Supported	Windows 2000 / Windows XP / Windows Server 2003 / Windows Vista	
CPU	GV-1480	Pentium 4-3.0 GHz Dual Core
	GV-1240	Pentium 4-3.0 GHz Dual Core
	GV-1120	Pentium 4-3.0 GHz with Hyper-Threading
RAM	2 x 512 MB Dual Channels (Windows 2000 / XP)	
	2 x 1 GB Dual Channels (Windows Server 2003 / Vista)	
HDD	GV-1480	250 GB
	GV-1240	120 GB
	GV-1120	80 GB
VGA	ATI Radeon X600 / NVIDIA 6200	
DirectX	9.0c	

Note:

1. The hard disk space required to install GV-System must be at least 1 GB.
2. Currently GV Video Capture Cards are not compatible with VIA-series and ATI-series chipset motherboards, and 64-bit Windows operating system.
3. The recording rate is set to 320 x240 resolution.